


DETAIL:DOTS
SCALE: 2:1

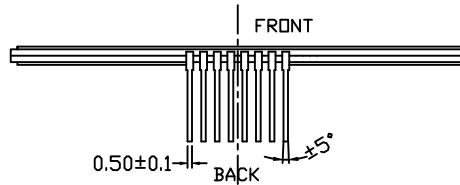

Notes:

1. GENERAL TOLERANCE: ± 0.2 .
2. (...) IS REFERENCE DIMENSION.
3. * CRITICAL DIMENSION
4. COMPLYABLY RoHS.

PIN ASSIGNMENT

NO.	1	2	3	4	5	6	7	8
PIN	REST	SCL	SDA	VSS	VDD	VOUT	C1+	C1-

DISPLAY TYPE	FSTN POSITIVE TRANSFLECTIVE
OPERATING METHOD	1/16 DUTY 1/5 BIAS
VIEWING ANGEL	6:00
LCD Driver IC	ST7032i-0D
Interface	I2C
Vdd	3.0V
V<LCD>	5.0V
OPERATION TEMPERATURE	-20°C TO 70°C
STORAGE TEMPERATURE	-30°C TO 80°C

						DRAWN	ZJJ	09.2.20	TITLE	MODULE SPEC.	DRAWING NO.			
						ME.CHECKED	XB	09.2.20			STR-TC0841			
						EE.CHECKED	ZJJ	09.2.20						
						PE.CHECKED	DB	09.2.20						
						APPROVED	LDK	09.2.20						
01		first issue		ZJJ	2009.2.20	CUSTOMER'S APPROVAL					UNIT	mm	SCALE	FIT
VER.	SYMBOL	AMENDMENT	SIGN	DATE					TRUEVISION TECHNOLOGIES LTD		3rd Angle		SHEET	1 OF 1