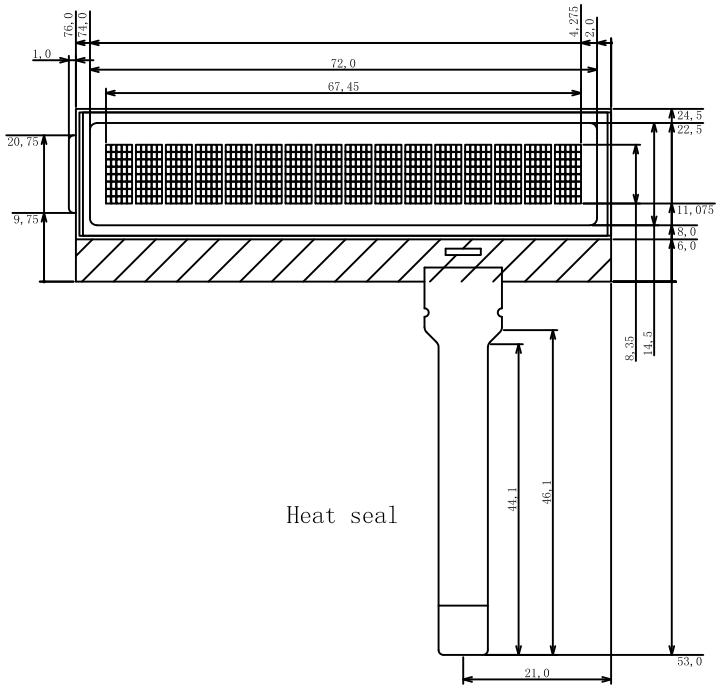

I/F No:

No	Symbol
1	DATA
2	SCK
3	STB
4	V0
5	VDD
6	VSS

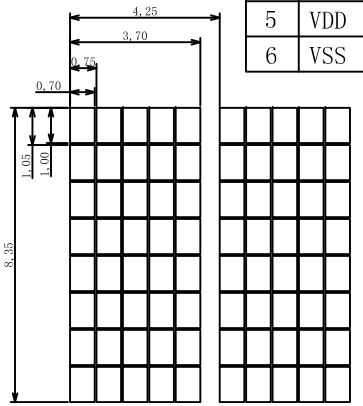

Dot size &Dot pitch

Display Type	TN
	POSITIVE
	REFLECTIVE
Front Polarizer	NORMAL
Driving Method	1/16 DUTY,1/5 BIAS
Viewing Direction	6 O'CLOCK
LCD Driver IC	CC5008/CGROM NO:08
Logic Voltage (V)	5.0V
LCD Driving Voltage	4.6V
Operation Temperature	0°C TO 50°C
Storage Temperature	-20°C TO 70°C
Interface	SERIAL
Backlight	NIL

NOTES:
1. GENERAL TOLERANCE: ±0.30.
2. (...) IS REFERENCE DIMENSION.
3. ✱ CRITICAL DIMENSION
4. RoHS COMPLIANT.

VER.	SYMBOL	DESCRIPTION OF CHANGES	SIGN	DATE
01		FIRST ISSUE	HJW	11-06-15

ME.CHECKED	HJW	2011-06-15
EE.CHECKED	ZY	2011-06-15
PE.CHECKED	WYL	2011-06-15
APPROVED	DXH	2011-06-15
CUSTOMER'S APPROVAL		

TITLE: MODULE SPEC.

DRAWING NO.: TC3089A

BOM NO.: BM110218-02-C

UNIT: mm | SCALE: FIT | 3rd Angle | SHEET 1 OF 1

TRUEVISION TECHNOLOGIES LTD