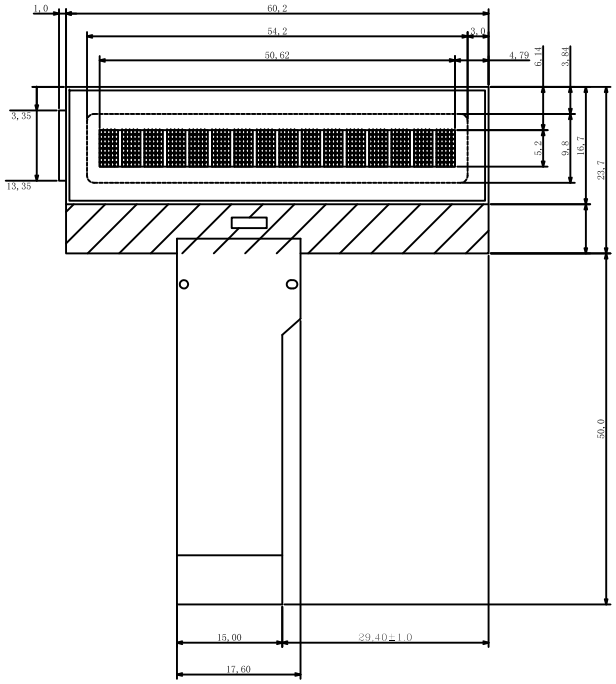

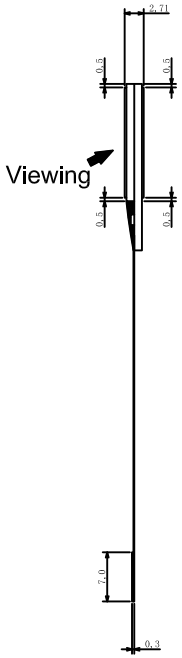

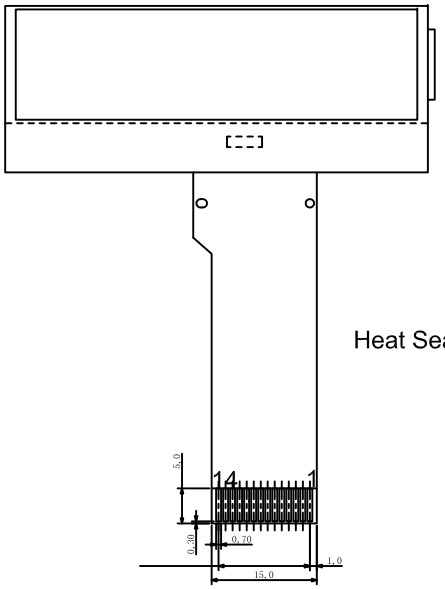



Dot size & Dot pitch

I/F No:

No	Symbol
1	DB7
2	DB6
3	DB5
4	DB4
5	DB3
6	DB2
7	DB1
8	DB0
9	E
10	R/W
11	RS
12	VLCD
13	VDD
14	VSS

NOTES:
1. GENERAL TOLERANCE: ±0.3.
2. (...) IS REFERENCE DIMENSION.
3. * CRITICAL DIMENSION
4. RoHS COMPLIANT.

Display Type	TN
	POSITIVE
	REFLECTIVE
Front Polarizer	NORMAL
Driving Method	1/16 DUTY,1/5 BIAS
Viewing Direction	6 O'CLOCK
LCD Driver IC	CC5008/CGROM No.:02
Logic Voltage (V)	5.0V
LCD Driving Voltage	4.6V
Operation Temperature	0°C TO 50°C
Storage Temperature	−20°C TO 70°C
Interface	PARALLEL
Backlight	NIL

VER.	SYMBOL	DESCRIPTION OF CHANGES	SIGN	DATE
01		FIRST ISSUE	HJW	11-07-29

ME.CHECKED	HJW	2011-07-29
EE.CHECKED	ZY	2011-07-29
PE.CHECKED	WYL	2011-07-29
APPROVED	DXH	2011-07-29
CUSTOMER'S APPROVAL		

TITLE
MODULE SPEC.

DRAWING NO.
STR-TC3110

UNIT	mm	SCALE	FIT
3rd Angle		SHEET	1 OF 1

BOM NO.: BM110718-10

TRUEVISION TECHNOLOGIES LTD