

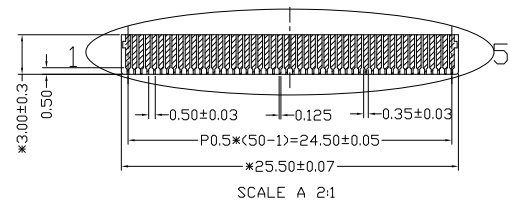
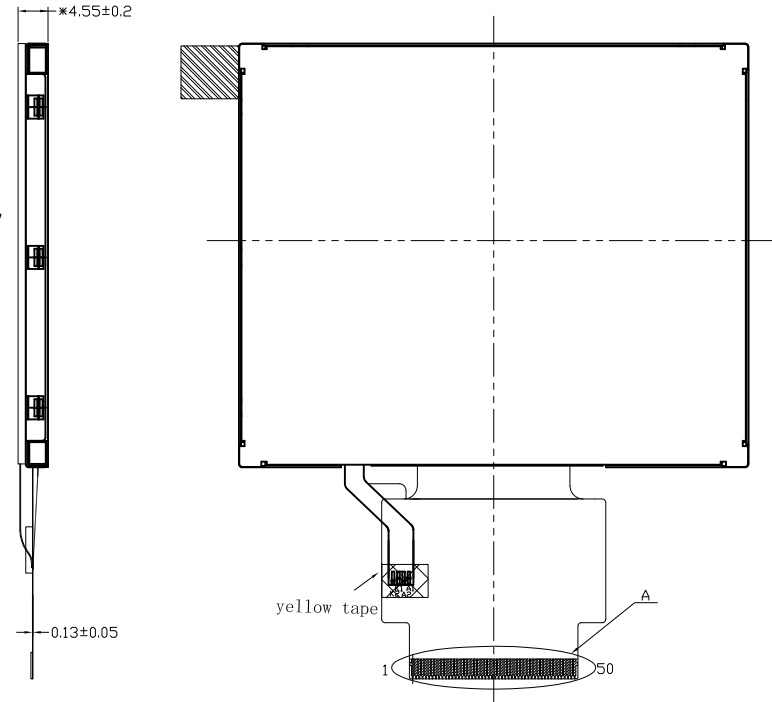


PIN ASSIGNMENT

NO.	SIGNAL	NO.	SIGNAL
21	B6	1	Yu
22	B7	2	XR
23	G0	3	YD
24	G1	4	XL
25	G2	5	GND
26	G3	6	GND
27	G4	7	GND
28	G5	8	GND
29	G6	9	PDL
30	G7	10	SDD
31	R0	11	/RESET
32	R1	12	/CS
33	R2	13	SCK
34	R3	14	SDI
35	R4	15	B0
36	R5	16	B1
37	R6	17	B2
38	R7	18	B3
39	DEN	19	B4
40	IHS	20	B5
41	IVS		
42	CLK		
43	SHUT		
44	GND		
45	VCC		
46	VCOM		
47	K2		
48	A2		
49	A1		
50	K1		

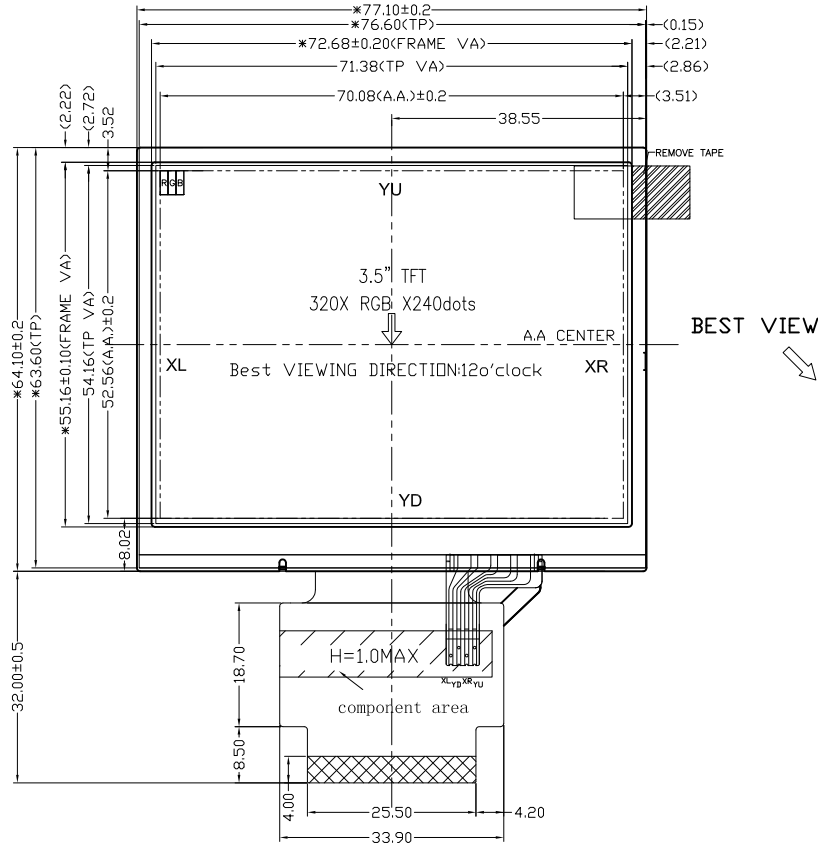

NOTE:
1. GENERAL TOLERANCE: ±0.3.
2. (...) IS REFERENCE DIMENSION.
3. * CRITICAL DIMENSION
4. COMPLYABLY RoHS.

Panel	Display Type	α-Si TFT, TRANSMISSIVE
	Viewing Angle	Best Image View: 12 O'clock
LCM	Driver IC	HX8238-D
	Interface	24BIT RGB
	Operating Voltage	3.3V
	Luminance	280(Typ.)/240(Min.)
	Center CIE coordinate	
	Backlight unit	WHITE(9.9V,40mA/6LED)
	Connector type	
	Operation Temp.	-20°C TO 70°C
	Storage Temp.	-30°C TO 80°C

VER.	SYMBOL	AMENDMENT	SIGN	DATE	CUSTOMER'S APPROVAL	DRAWN	HL	12.11.16	TITLE	DRAWING NO.	UNIT	mm	SCALE	FIT
01		first issue	HL	12.11.16		ME.CHECKED	YB	12.11.16	MODULE SPEC.	STR-TF0438RT035	3rd Angle			
						EE.CHECKED	WW	12.11.16						
						PE.CHECKED	FF	12.11.16						
						APPROVED	HY	12.11.16						
									TRUEVISION TECHNOLOGIES LTD					