

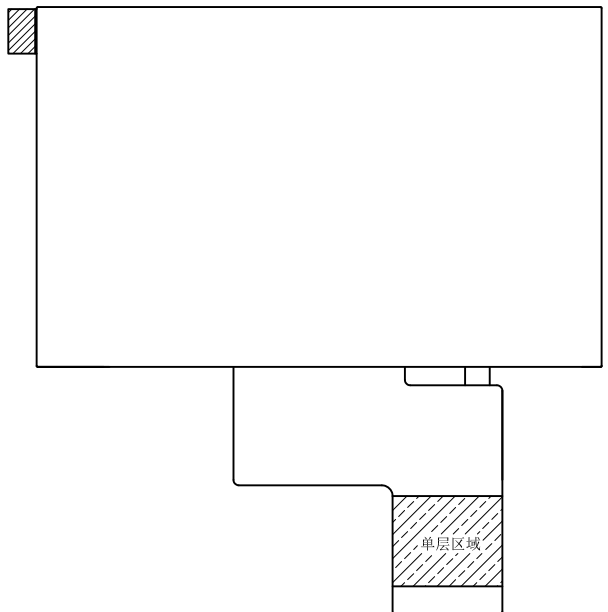
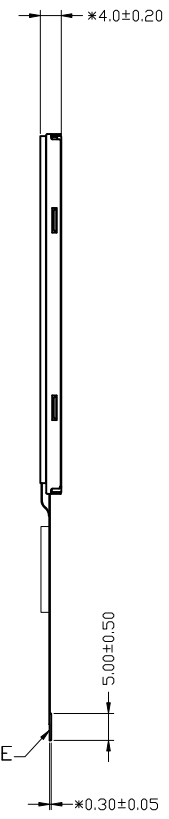


NO.	SIGNAL
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	Hsync
33	Vsync
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

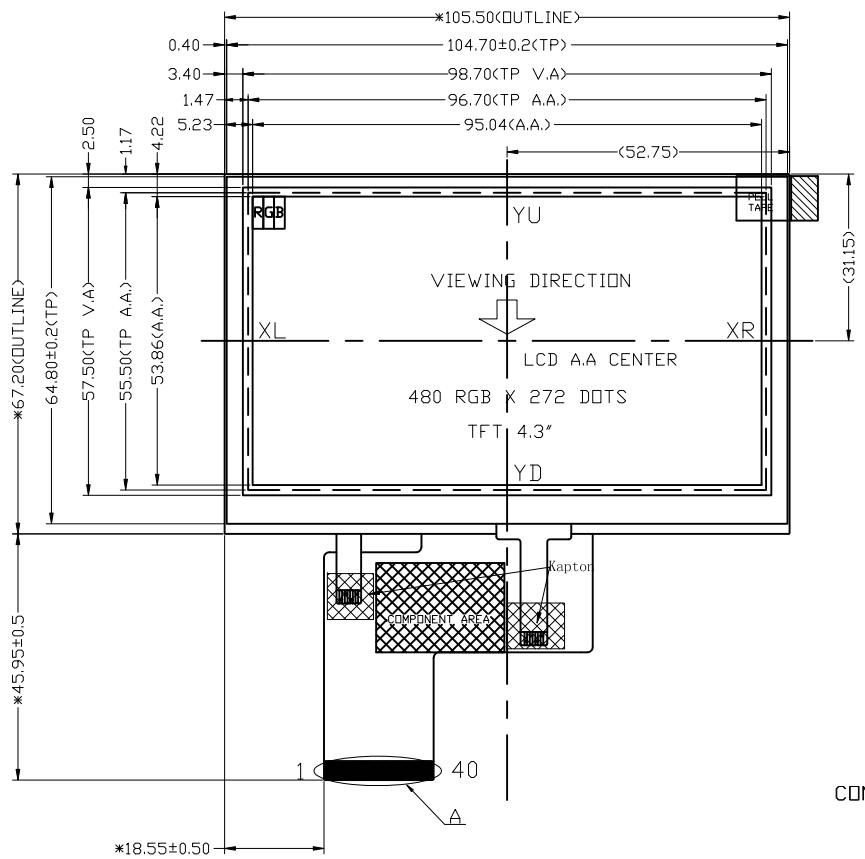


*18.55±0.50

- NOTE:
1. GENERAL TOLERANCE: ±0.2.
 2. (...) IS REFERENCE DIMENSION.
 3. * CRITICAL DIMENSION
 4. COMPLY R0HS.
 5. FPC CONNECTOR: FH19-40S-05SH(51).



B/L CIRCUIT DIAGRAM

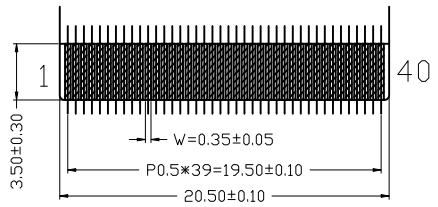

DETAIL A 3:1

Display Type	TFT NORMAL WHITE TRANSMISSIVE
Front Polarizer	
Operating Method	
Viewing Angle	12 O'CLOCK
LCD Driver IC	HX8257-A
Operating Voltage	3.3V
Operation Temperature	-20°C TO 60°C
Storage Temperature	-30°C TO 70°C
High Temperature/Humidity Storage	
Interface	
Backlight	WHITE(16.0V, 40mA)

				DRAWN	XB	TITLE MODULE SPEC.		DRAWING NO. STR-TF5405APT043					
				ME.CHECKED				UNIT			mm	SCALE	FIT
				EE.CHECKED	CLY			3rd Angle				SHEET	1 OF 1
				PE.CHECKED									
				APPROVED	LDK								
01	First Issue			DYM	08-12-11	CUSTOMER'S APPROVAL		TRUEVISION TECHNOLOGIES LTD.					
VER.	AMENDMENT			SIGN	DATE								