




PULL TAPE

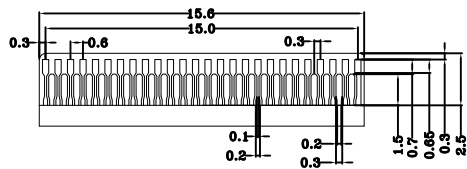

PI THICK=0.2±0.03 WITH FPC INCLUDE

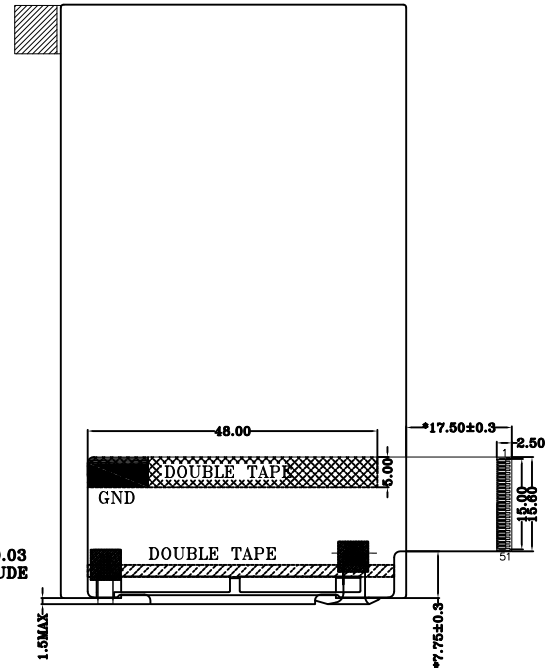

Detail  
Scale 3:1



LED CIRCUIT DIAGRAM

No.	PIN NAME
1	LED-
2	LED+
3	YU
4	XL
5	YD
6	XR
7	VDD/2.8V
8	VDD/1.8V
9	NC
10	NC
11	NC
12	NC
13	SDO
14	SDI
15	NC
16	WRX/SCL
17	NC
18	CSX
19	RESX
20	DB23
21	DB22
22	DB21
23	DB20
24	DB19
25	DB18
26	DB17
27	DB16
28	DB15
29	DB14
30	DB13
31	DB12
32	DB11
33	DB10
34	DB09
35	DB08
36	DB07
37	DB06
38	DB05
39	DB04
40	DB03
41	DB02
42	DB01
43	DB00
44	DEN
45	GND
46	PCLK
47	GND
48	HS
49	VS
50	TE-R
51	LEDPWM

Panel	Display Type	3.97" TFT/TRANSMISSIVE
	Viewing Angle	<b>BEST VIEW DIRECTION 6 O'CLOCK</b>
LCM	Driver IC	NT35512SH
	Interface	24BIT RGB
	Operating Voltage	VCC=2.8V
	Luminance	---
	Center coordinate	--
	Backlight	WHITE(25.6V 15-20MA)
	Connector type	FH26-51S-0.3SHW(HIROSE)
	Operation Temp.	-20°C TO 70°C
	Storage Temp.	-30°C TO 80°C

					DRAWN	LH	3.97 TFT+RTP	DRAWING NO.				
					CHECKED	wxt		BT140219-13	STR-TF7325RT040			
					APPROVED	pxh			UNIT	mm	SCALE	FIT
01		first issue		SSG	2014.03.6	CUSTOMER'S APPROVAL		3rd Angle		SHEET 1 OF 1		
VER.	SYMBOL	AMENDMENT	SIGN	DATE			TRUEVISION TECHNOLOGIES LTD					