

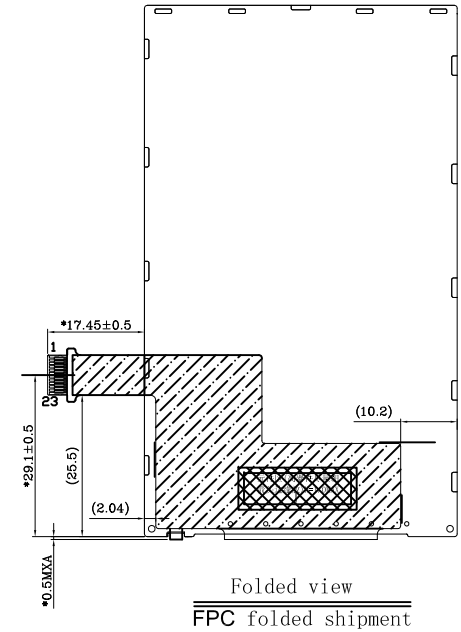
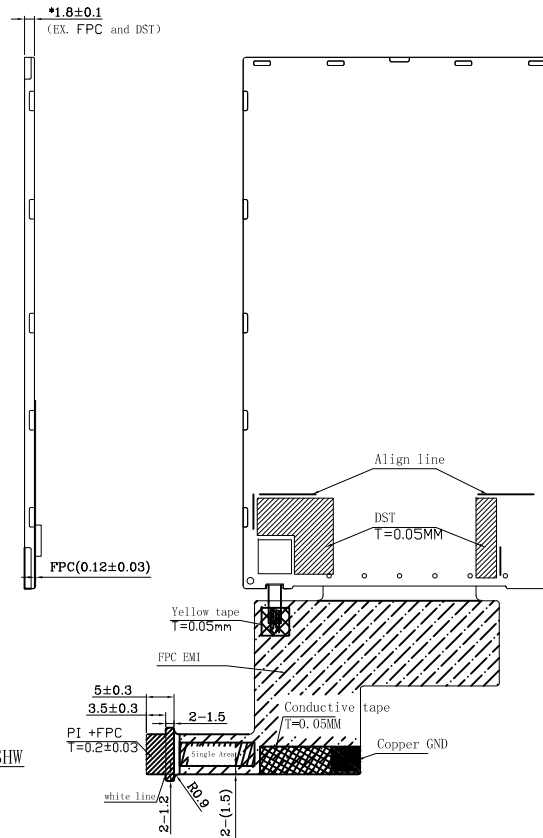


NO.	SIGNAL
1	GND
2	DPO
3	DNO
4	GND
5	DP1
6	DN1
7	GND
8	CLKP
9	CLKN
10	GND
11	RESET/
12	GND
13	+2.8V_VDD
14	GND
15	+1.8V_VDDIO
16	GND
17	LED_DP(低电平)
18	GND
19	TE
20	LEDK
21	LEDA
22	NC
23	GND

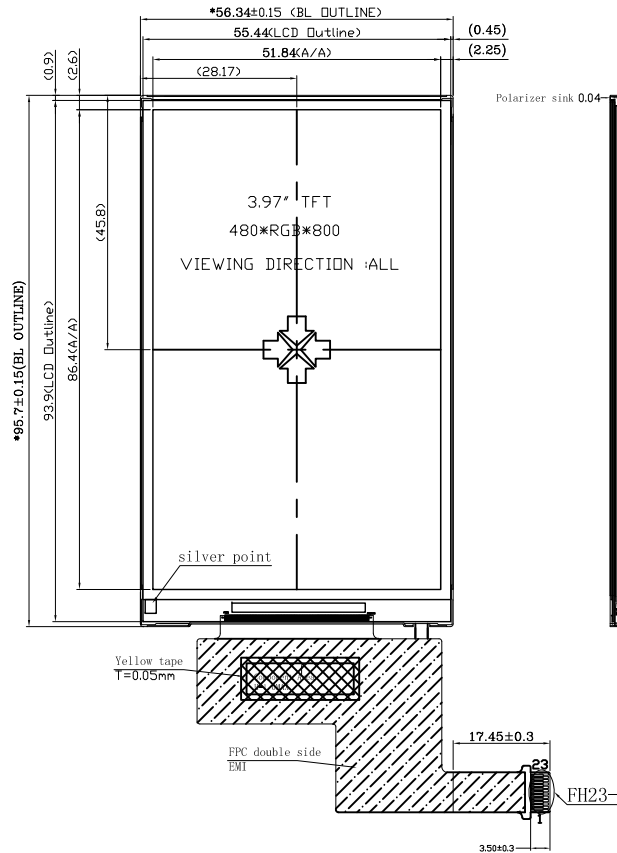

- NOTE:
1. GENERAL TOLERANCE: ± 0.20 ;
 2. (...) IS REFERENCE DIMENSION;
 3. * CRITICAL DIMENSION,
 4. COMPLYABLY RoHS.
 5. FPC Mipi lines covered by 100ohm double side EMI



LED CIRCUIT DIAGRAM

Panel	Display Type	TFT,NORMALLY BLACK
	Viewing Angle	ALL
	Driver IC	NT35512
LCM	Interface	MIPI
	Operating Voltage	VDD=2.8V IOVDD=1.8V
	Luminance	350(TYP.)/320(MIN.)
	Center coordinate	X=0.31±0.03 Y=0.32±0.03
	Backlight	WHITE(20mA/Serial)
	Connector type	FH23-23S-0.3SHW
Operation Temp.	-20°C TO 70°C	
Storage Temp.	-30°C TO 80°C	

VER.	SYMBOL	AMENDMENT	LH	DATE	CUSTOMER'S APPROVAL	TITLE	DRAWING NO.	
01		First Issue	LH	2015.10.8		MODULE SPEC.	STR-TF7343DI040	
							UNIT	mm
							SCALE	PIT
							3rd Angle SHEET 1 OF 1	
						TRUEVISION TECHNOLOGIES LTD		