
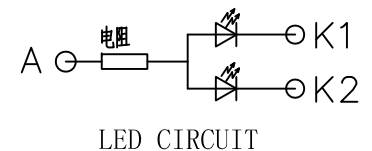
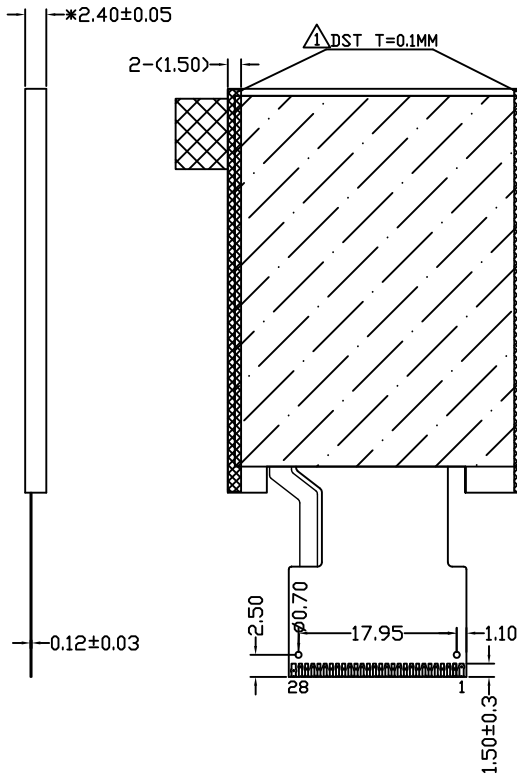


PIN NO.	DEFINATION
1	GND
2	TE
3	GND
4	DB7
5	/CS
6	DB6
7	GND
8	DB5
9	GND
10	DB4
11	GND
12	DB3
13	GND
14	DB2
15	GND
16	DB1
17	GND
18	DB0
19	GND
20	/WR
21	GND
22	RS
23	/RESET
24	VDD
25	GND
26	LED_A
27	LED_K
28	GND

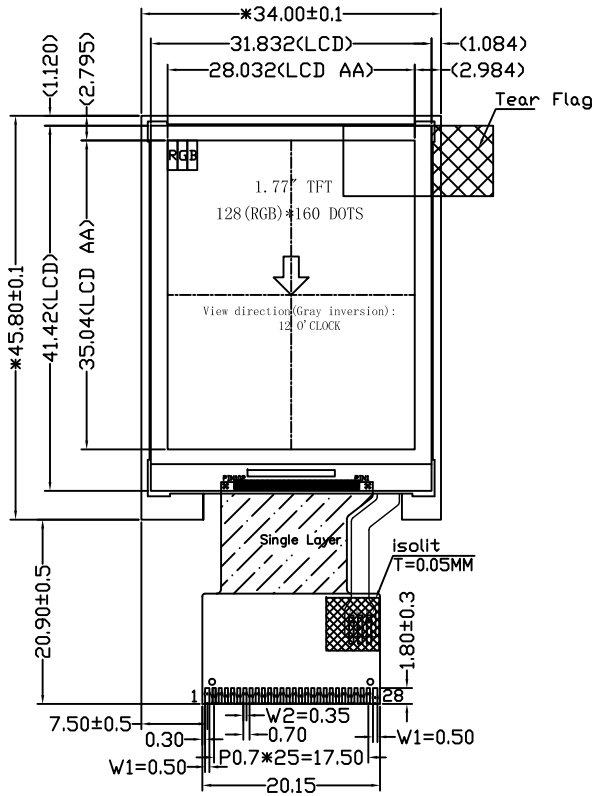

- NOTE:
1. GENERAL TOLERANCE: ±0.20.
  2. (...) IS REFERENCE DIMENSION.
  3. \* CRITICAL DIMENSION
  4. COMPLIABLY RoHS.

Panel	Display Type	a-Si TFT, TRANSMISSIVE
	Viewing Angle	Best Image Viewing: 6 O'CLOCK Gray inversion Viewing: 12 O'CLOCK
	Driver IC	ST7735S
	Interface	8080 8Bits
LCM	Operating Voltage	VDD=3.3V
	Luminance	90(TYP.)/80(MIN.)
	Center CIE coordinate	TBD
	Backlight unit	WHITE(3.2V,2LED,40mA)
Connector type	/	
Operation Temp.	-20°C TO 70°C	
Storage Temp.	-30°C TO 80°C	

VER.	SYMBOL	AMENDMENT	SIGN	DATE	CUSTOMER'S APPROVAL	TITLE	DRAWING NO.
01		First Issue	LH	2014.8.21		MODULE SPEC.	STR-TF7349ADT018
						BOM: BT140729-06	UNIT mm SCALE FIT
							3rd Angle  SHEET 1 OF 1
						TRUEVISION TECHNOLOGIES LTD	