

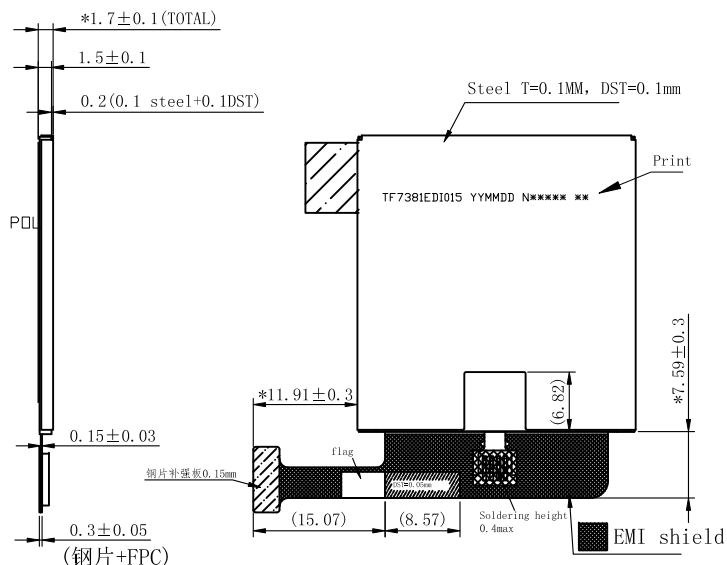


FPC INTERFACE

No.	Symbol
1	VBAT (+)
2	ISINKO (-)
3	ISINK1 (-)
4	ISINK2 (-)
5	GND
6	LPTE (TE)
7	VIO18 (1.8V)
8	VIO28 (2.8V)
9	LSRSTB (RESET)
10	GND
11	TDPO
12	TDNO
13	GND
14	TCP
15	TCN
16	GND
17	NC
18	NC
19	NC
20	NC
21	NC
22	NC
23	NC
24	GND

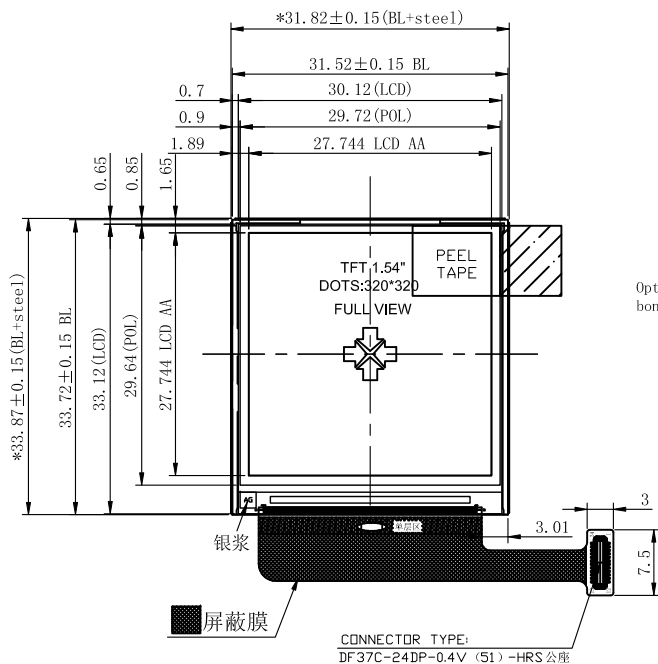

- NOTE:
1. GENERAL TOLERANCE: ±0.20.
 2. (<...>) IS REFERENCE DIMENSION.
 3. * CRITICAL DIMENSION
 4. COMPLIABLY RoHS.



Panel	Display Type	TFT, TRANSMISSIVE
	Viewing Angle	ALL
LCM	Driver IC	ST7796S
	Interface	MIPI 1LANE
	Operating Voltage	IOVCC=1.8V VCC=2.8V
	Luminance	300TYP
	Center coordinate	TBD
	Backlight	/
	Connector type	DF37C-24DP-0.4V (51)
Operation Temp.	-20°C TO 70°C	
Storage Temp.	-30°C TO 80°C	

VER.	SYMBOL	AMENDMENT	SIGN	DATE	CUSTOMER'S APPROVAL	TITLE	DRAWING NO.
01		First Issue	LH	2015.12.22		MODULE SPEC.	STR-TF7381EDI015
							UNIT: mm SCALE: FIT
							3rd Angle SHEET 1 OF 1
						TRUEVISION TECHNOLOGIES LTD	