


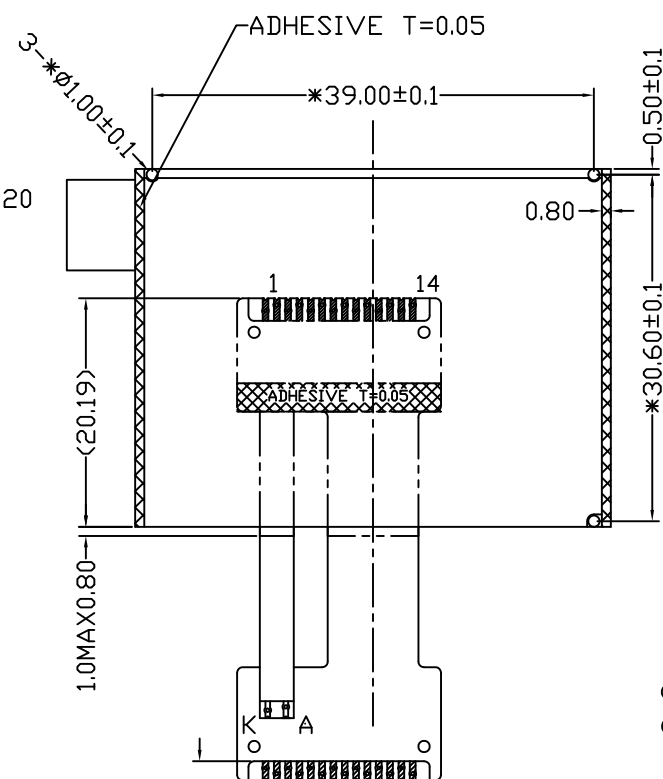
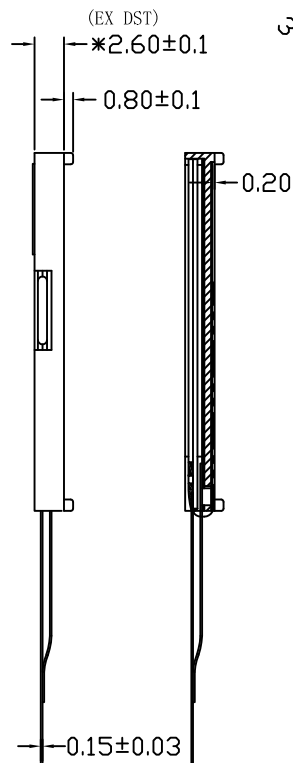
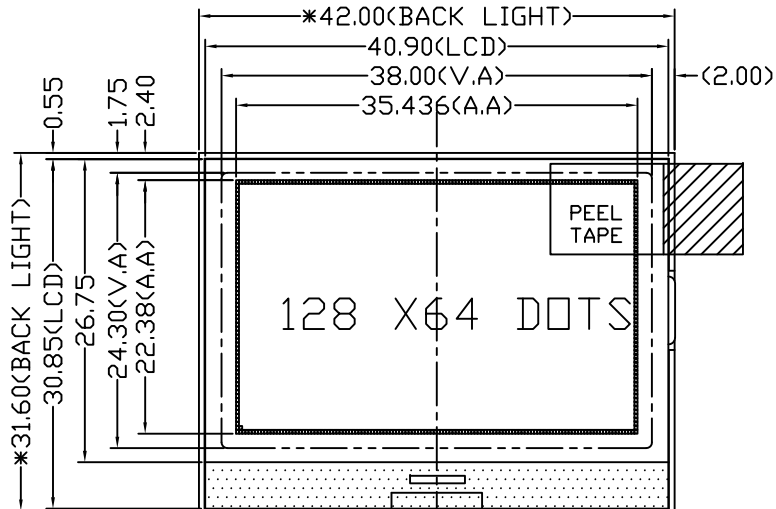


PIN ASSIGNMENT

NO.	SIGNAL
1	LED-A
2	LED_K
3	GND
4	CSB
5	RESET
6	A0
7	SCL
8	SDA
9	VDD
10	VSS
11	VO
12	XV0
13	VG
14	GND



- NOTE:
1. GENERAL TOLERANCE: ±0.2.
 2. (...) IS REFERENCE DIMENSION.
 3. * CRITICAL DIMENSION
 4. COMPLIABLY RoHS.

Display Type	FSTN POSITIVE TRANSMISSIVE
Front Polarizer	
Operating Method	1/65 DUTY, 1/9 BIAS
Viewing Angle	6 O'CLOCK
LCD Driver IC	ST7567
Operating Voltage	Vdd=2.8V
Driver Voltage	VLCD=9.0V
Operation Temperature	-20°C TO 70°C
Storage Temperature	-30°C TO 80°C
Interface	SERIAL, 4-SPI
Backlight	AMBER(1.95V, 20mA)

VER.	SYMBOL	AMENDMENT	SIGN	DATE	CUSTOMER'S APPROVAL	DRAWN	XB	TITLE	DRAWING NO.
01		first issue	XB	09.8.28				MODULE SPEC.	STR-TG0868
									UNIT mm SCALE FIT
									3rd Angle SHEET 1 OF 1
								TRUEVISION TECHNOLOGIES LTD.	