


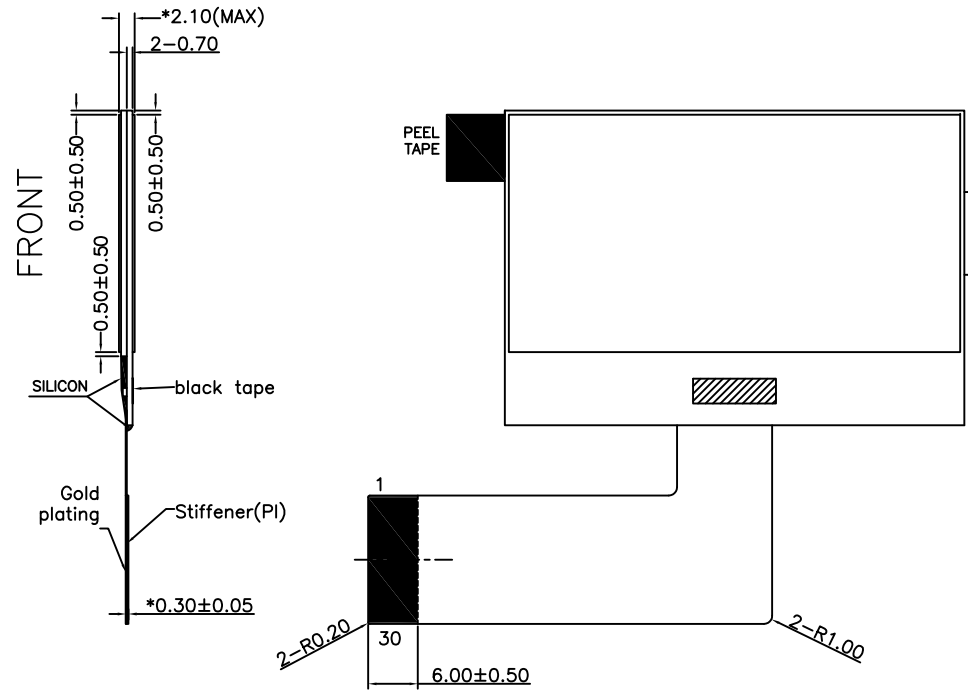


PIN ASSIGNMENT

NO.	SIGNAL
1	ESD-GND
2	/CS1
3	/RES
4	A0
5	/WR
6	/RD
7	D0
8	D1
9	D2
10	D3
11	D4
12	D5
13	D6
14	D7
15	VDD
16	VSS
17	VOUT
18	CAP3P
19	CAP1N
20	CAP1P
21	CAP2P
22	CAP2N
23	CAP4P
24	V4
25	V3
26	V2
27	V1
28	V0
29	ESD-GND
30	NC

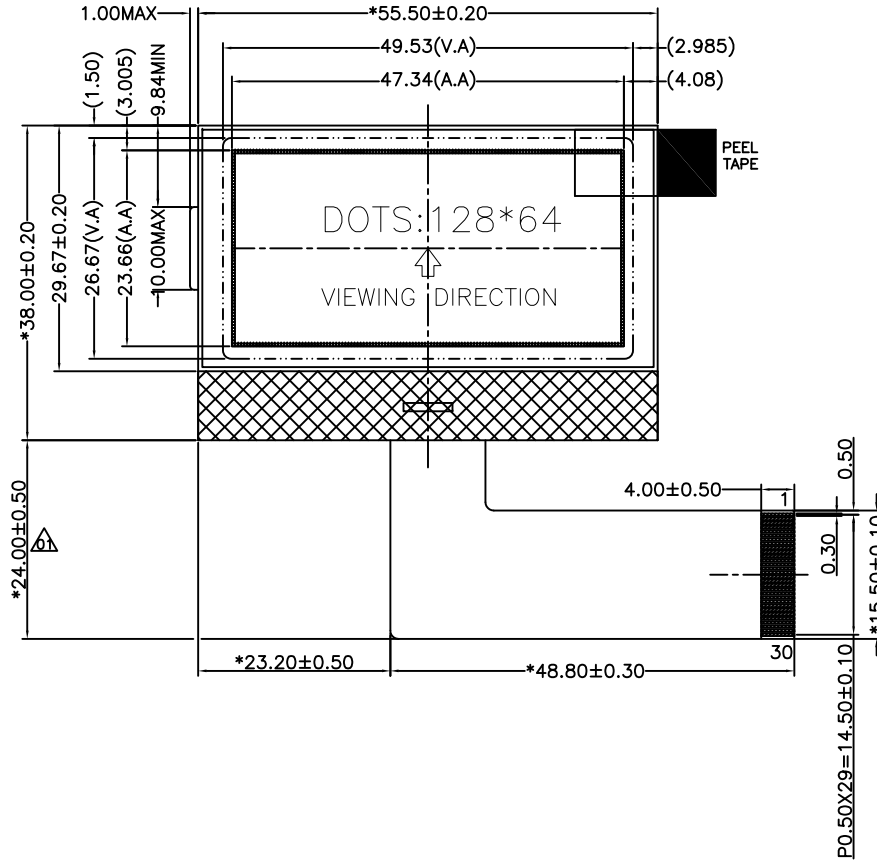

DETAIL: DOTS (10:1)



Display Type	STN(GRAY)
	POSITIVE
	TRANSFLECTIVE
Front Polarizer	
Operating Method	1/65 DUTY,1/9 BIAS
Viewing Angle	6 O'CLOCK
LCD Driver IC	ST7565R-G
Operating Voltage	VDD=3.0V
Driver Voltage	VLCD=9.0V
Operation Temperature	-20°C TO 70°C
Storage Temperature	-30°C TO 80°C
Interface	
Backlight	

- NOTE:
1. GENERAL TOLERANCE: ±0.20.
  2. (...) IS REFERENCE DIMENSION.
  3. \* CRITICAL DIMENSION
  4. RoHS COMPLIANT

VER.	SYMBOL	AMENDMENT	SIGN	DATE	DRAWN	YC	TITLE	DRAWING NO.			
					EE.CHECKED	HJB	MODULE SPEC.	STR-TG0885B			
					PE.CHECKED	HJB		UNIT mm SCALE FIT			
					APPROVED	YB		3rd Angle  SHEET 1 OF 1			
01		First Issue	YC	12.03.16	CUSTOMER'S APPROVAL			BOM NO.:BM120315-05	TRUEVISION TECHNOLOGIES LTD		