


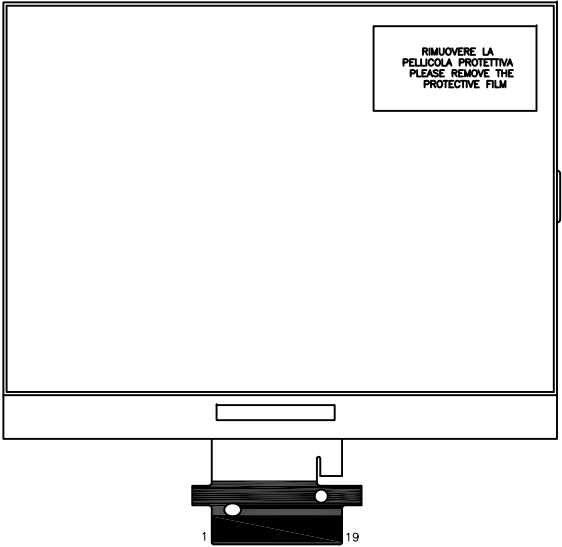
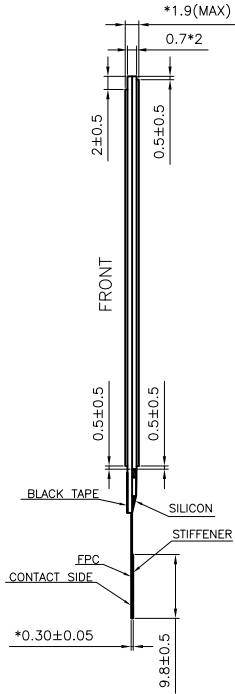


PIN ASSIGNMENT

NO	SYMBOL
1	SVD2
2	VSS
3	MV2
4	MV1
5	VC
6	V1
7	V2
8	V3
9	VDD2
10	VDD
11	VDI
12	VSS
13	SI
14	SCL
15	A0
16	RESET
17	CS
18	RT2
19	RT1

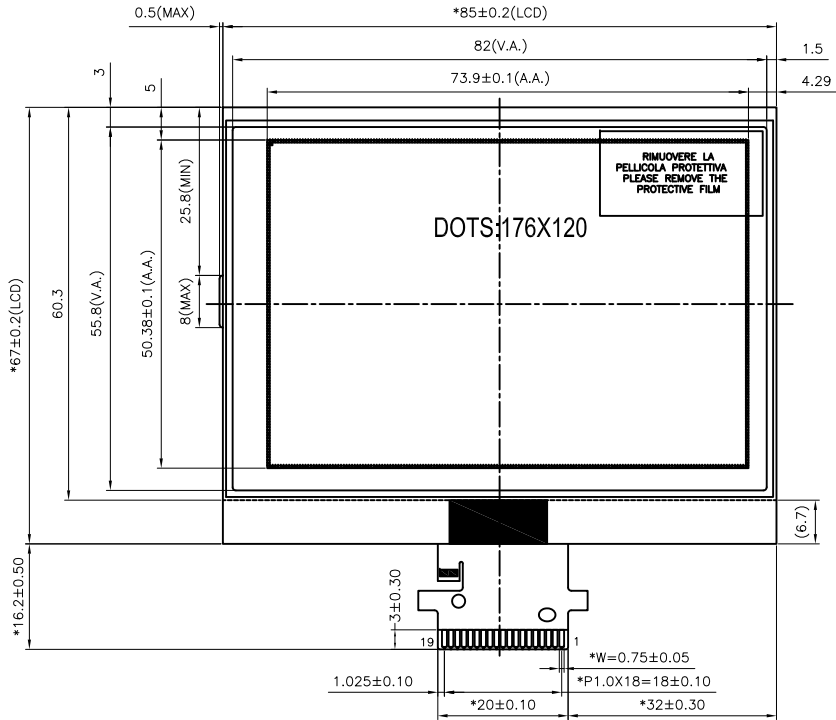

- NOTE:
1. GENERAL TOLERANCE: ± 0.2 .
 2. (...) IS REFERENCE DIMENSION.
 3. COMPLY ROHS.
 4. * CRITICAL DIMENSION.

Display Type	ESTN NEGATIVE TRANSMISSIVE
Front Polarizer	
Operating Method	1/120 DUTY,1/11 BIAS
Viewing Angle	3 O'CLOCK
LCD Driver IC	S1D15719
Operating Voltage	VDI=3.0V,VDD=VDD2=5.0V
Driver Voltage	VLCD=16.9V
Operation Temperature	-20°C TO 70°C
Storage Temperature	-30°C TO 80°C
Interface	
Backlight	

VER.	SYMBOL	AMENDMENT	SIGN	DATE	CUSTOMER'S APPROVAL	DRAWN	CL	TITLE	DRAWING NO.			
01		first issue	CL	10.01.22				MODULE SPEC.	STR-TG0886			
									UNIT	mm	SCALE	FIT
									3rd Angle		SHEET 1 OF 1	
						TRUEVISION TECHNOLOGIES LTD						