




PIN ASSIGNMENT

NO.	SIGNAL
1	L4
2	L3
3	VG
4	XV0
5	V0
6	VSS
7	VDD
8	SDA
9	SCLK
10	A0
11	/RES
12	CS1
13	L2
14	L1



电-光特性: LED 颜色: WHITE

测试条件(环境温度=+25℃)	最小	典型	最大	单位
正向电流	40	60	80	mA
定电压Vf=3.3V				

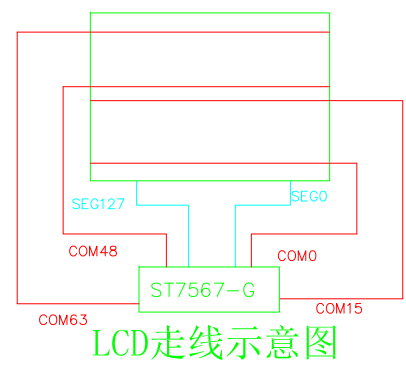

- NOTE:
1. GENERAL TOLERANCE: ±0.2.
  2. (...) IS REFERENCE DIMENSION.
  3. \* CRITICAL DIMENSION
  4. COMPLYABLY RoHS.

DISPLAY TYPE	FSTN POSITIVE TRANSFLECTIVE
FRONT POLARIZER	NORMAL
OPERATING METHOD	1/33 DUTY 1/5 BIAS
OPERATION VOLTAGE(VOP/VDD)	VOP=9.0V VDD=3.0V
VIEWING ANGLE	6:00
OPERATION TEMPERATURE	-20℃ TO 70℃
STORAGE TEMPERATURE	-30℃ TO 80℃
CONNECTOR TYPE	FPC
LCD CONTROLLER/DRIVER	ST7567-G
BACKLIGHT COLOR	WHITE

01		JYY	10.12.02	DRAWN	CCX	TITLE	DRAWING NO.		
VER.	SYMBOL	AMENDMENT	SIGN	DATE	EE.CHECKED	LXY	MODULE SPEC.		STR-TG0911
					ME.CHECKED	LXY	BOM NO.:		UNIT
					APPROVED	YB			mm
					CUSTOMER'S APPROVAL		TRUEVISION TECHNOLOGIES LTD.		SCALE
									FIT
									3rd Angle
									SHEET 1 OF 1