
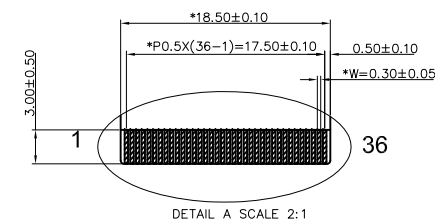


PIN ASSIGNMENT

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
SIGNAL	CD	RW-/WR	DO	D1	D2	D3	D4	D5	D6	D7	E-/RD	RST	NC	NC	BMO	NC	NC	CS0
PIN NO.	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36
SIGNAL	VSS	VDD	VA0-	VA1-	VA1+	VB0-	VB0+	VB1-	VB1+	VA0+	NC	NC	NC	NC	NC	VLCDOUT	VLCDIN	

NOTE:

1. GENERAL TOLERANCE: ±0.20.
2. (...) IS REFERENCE DIMENSION.
3. \* CRITICAL DIMENSION
4. RoHS COMPLIANT



Display Type	FSTN
Front Polarizer	TRANSPARENT
Operating Method	1/128 DUTY/1/12 BIAS
Viewing Angle	8 0'CLOCK
LCD Driver IC	UC1811s
Operating Voltage	VOP=14.5V/VDD=3.3V
Operation Temperature	-20C TO 70C
Storage Temperature	-30C TO 80C
High Temperature/Humidity Storage	
Connector Type	FPC
Backlight	WHITE If=80mA, Vf=3.2±0.2V

				<b>DRAWN</b>	ZDL	<b>TITLE</b>			<b>DRAWING NO.</b>		
				<b>EE.CHECKED</b>	YQ	<b>MODULE SPEC.</b>			STR-TG3138		
				<b>PE.CHECKED</b>	YQ						
				<b>APPROVED</b>	YB						
				<b>BOM NO.:</b>	BM120914-02A	<b>UNIT</b>			mm	<b>SCALE</b>	<b>FIT</b>
01	first issue			ZDL	12.10.29	<b>CUSTOMER'S APPROVAL</b>			3rd Angle		
VER.	SYMBOL	<b>AMENDMENT</b>		SIGN	DATE				<b>TRUEVISION TECHNOLOGIES LTD</b>		