


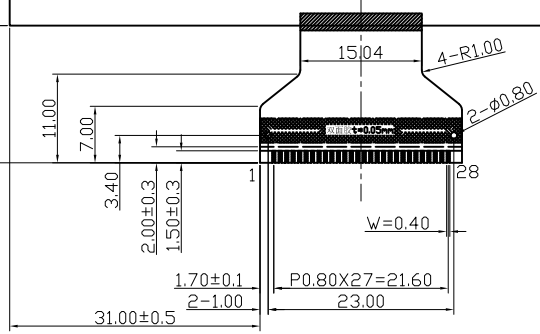
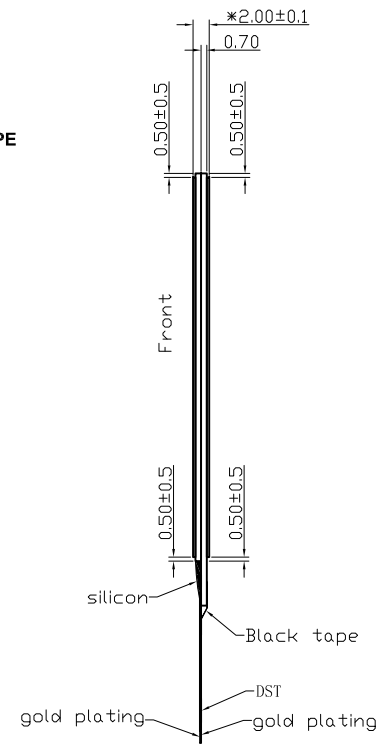


PIN ASSIGNMENT

NO.	SIGNAL
1	NC
2	VLCD
3	VS+
4	VS-
5	VB0-
6	VB1-
7	VB1+
8	VB0+
9	VDD
10	VDD
11	VSS
12	VSS
13	TST4
14	BMO
15	CS0
16	CD
17	WR1
18	WR0
19	RST
20	D0
21	D1
22	D2
23	D3
24	D4
25	D5
26	D6
27	D7
28	NC

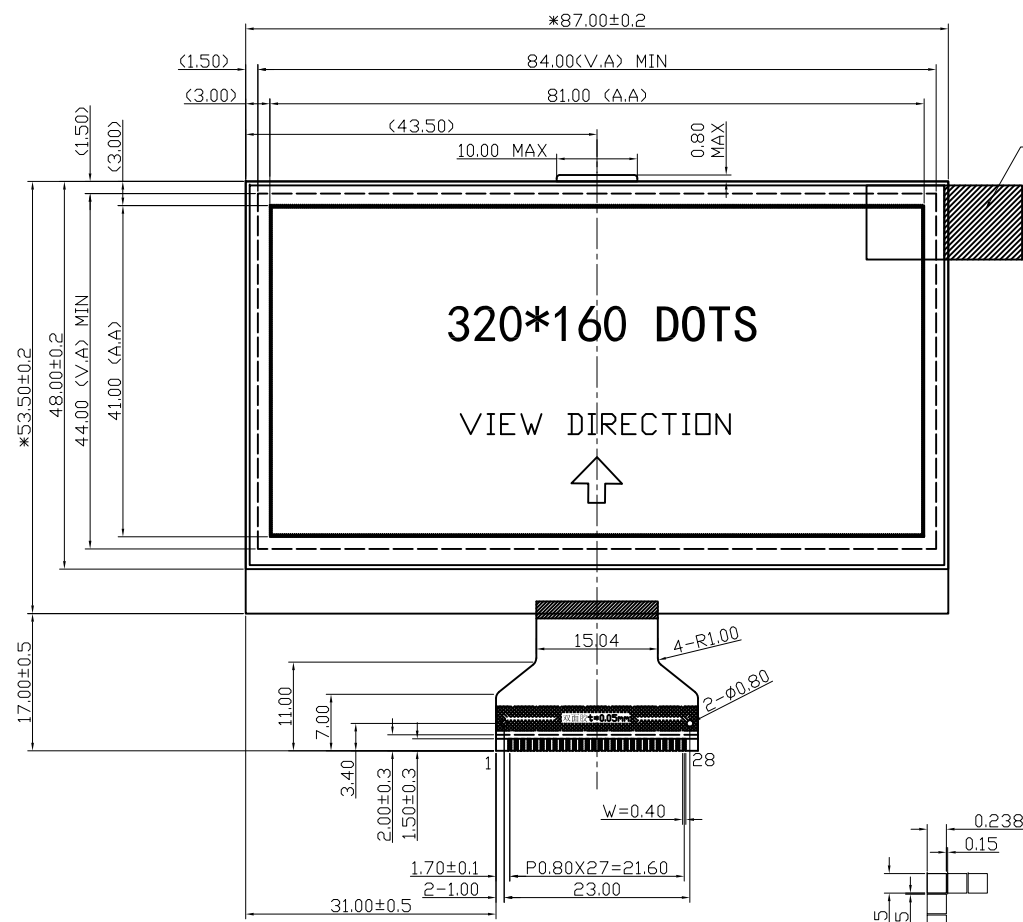

NOTE:  
 1. GENERAL TOLERANCE: ±0.2.  
 2. ( ) IS REFERENCE DIMENSION.  
 3. \* CRITICAL DIMENSION  
 4. RoHS COMPLIANT

Display Type	FSTN POSITIVE TRANSMISSIVE
Front Polarizer	
Operating Method	1/160 DUTY, 1/12 BIAS
Viewing Angle	6 O'CLOCK
LCD Driver IC	UC1698U
Operating Voltage	VDD=3.2V VLCD=16.25V
Operation Temperature	-20°C TO 70°C
Storage Temperature	-30°C TO 80°C
High Temperature/Humidity Storage	50°C 90%RH 72Hrs

VER.	SYMBOL	AMENDMENT	SIGN	DATE	CUSTOMER'S APPROVAL	DRAWN	YC	TITLE	DRAWING NO.			
01		first issue	YC	11.04.13				MODULE SPEC.	STR-TG9018			
									UNIT	mm	SCALE	FIT
									3rd Angle		SHEET	1 OF 1
									BOM NO.:BM110323-03			
						TRUEVISION TECHNOLOGIES LTD						