




PIN ASSIGNMENT

NO.	SIGNAL
1	VG
2	XV0
3	VO
4	VSS
5	VDD
6	SI
7	SCL
8	A0
9	RES
10	CSB

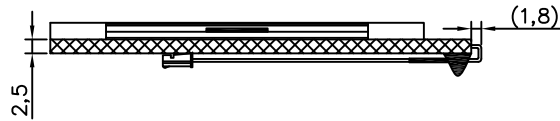

Display Type	STN (Y/G) POSITIVE TRANSMISSIVE
Front Polarizer	NORMAL
Driving Method	1/65 DUTY, 1/9 BIAS
Viewing Direction	6 O'CLOCK
LCD Driver IC	ST7567-G4B
Logic Voltage (V)	3.3V
LCD Driving Voltage	9.0V
Operation Temperature	0°C TO 50°C
Storage Temperature	-10°C TO 60°C
Interface	4-LINE SPI
Backlight	Green (15mA 3.0-3.4V)

- NOTES:
1. GENERAL TOLERANCE: ±0.2.
  2. (...) IS REFERENCE DIMENSION.
  3. \* CRITICAL DIMENSION
  4. RoHS COMPLIANT.

VER.	SYMBOL	DESCRIPTION OF CHANGES	SIGN	DATE	DRAWN	DATE	TITLE	DRAWING NO.
01		FIRST ISSUE	HJW	11-07-14	HuangJW	2011-07-14	MODULE SPEC.	TG9044
					EE.CHECKED	YangYan 2011-07-14		UNIT
					PE.CHECKED	WangYL 2011-07-14	SCALE	FIT
					APPROVED	DengXH 2011-07-14	BOM NO. : BM110704-01	3rd Angle
					CUSTOMER'S APPROVAL		TRUEVISION TECHNOLOGIES LTD	
							SHEET 1 OF 1	