

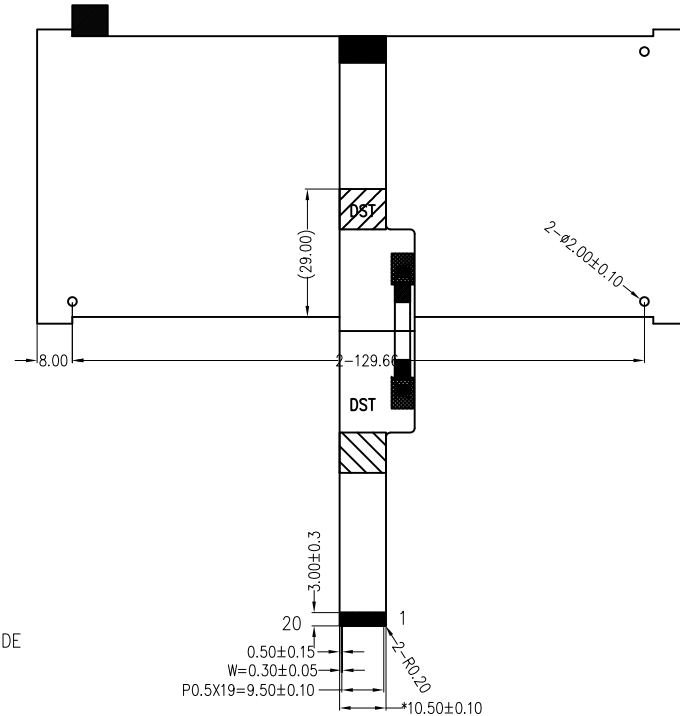
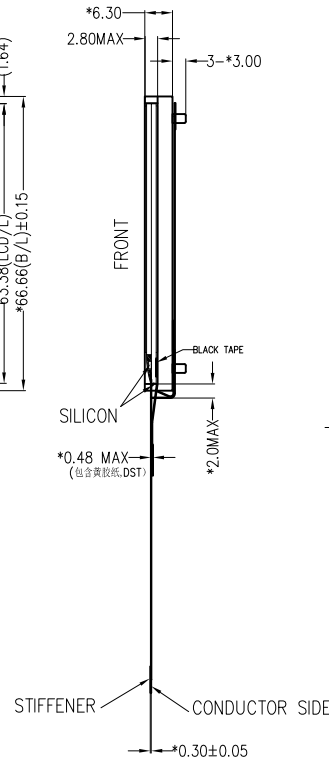
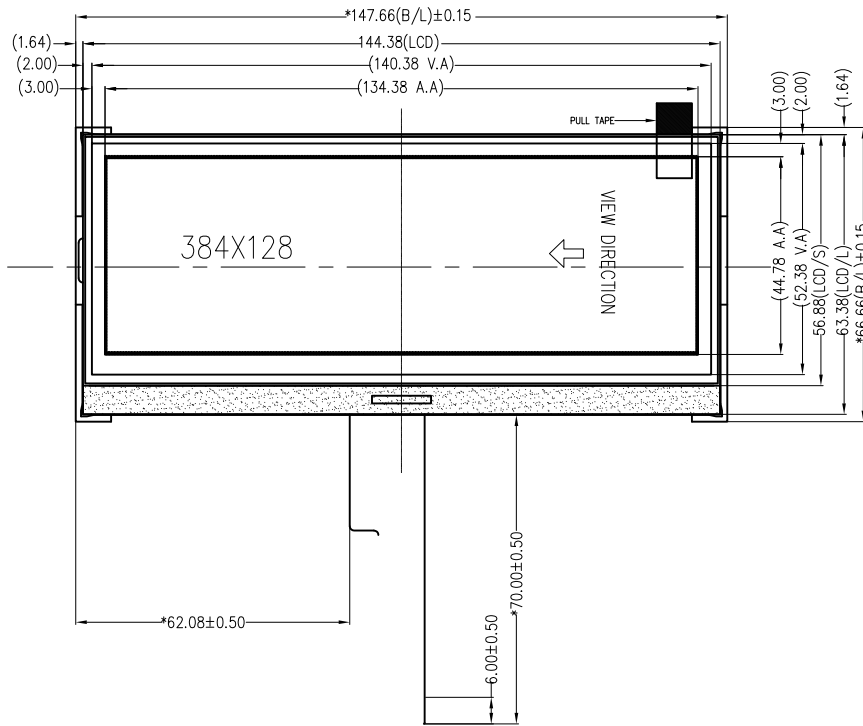



PIN ASSIGNMENT

NO.	SIGNAL
1	LEDA
2	LEDK
3	VSS
4	VSS
5	VLCD
6	VS+
7	VS-
8	VB0-
9	VB1-
10	VB1+
11	VB0+
12	VDD
13	VSS
14	CS0
15	CD
16	RST
17	DO
18	DB
19	VSS
20	VSS



- NOTE:  
 1. GENERAL TOLERANCE: ±0.20.  
 2. (...) IS REFERENCE DIMENSION.  
 3. \* CRITICAL DIMENSION  
 4. COMPLYABLY RoHS.



Display Type	FSTN
	POSITIVE
	TRANSMISSIVE
Operating Method	1/128 DUTY,1/12 BIAS
Viewing Angle	3 O'CLOCK
LCD Driver IC	UC1698u
Operating Voltage	VDD=3.3V VLCD=17.0V ▲
Operation Temperature	-20°C TO 70°C
Storage Temperature	-30°C TO 80°C
Interface	4-SPI
Backlight	WHITE(30mA,11.6--14.0V)

VER.	SYMBOL	AMENDMENT	SIGN	DATE	CUSTOMER'S APPROVAL	DRAWN	YC	ME.CHECKED	WYL	APPROVED	DXH	TITLE	BOM NO.:	DRAWING NO.	UNIT	mm	SCALE	FIT	SHEET	OF
01		first issue	YC	11.11.11		EE.CHECKED	YY	ME.CHECKED	WYL	APPROVED	DXH	MODULE SPEC.	BM111031-04	STR-TG9071	3rd Angle	⊕			SHEET 1 OF 1	
														TRUEVISION TECHNOLOGIES LTD						