






PIN ASSIGNMENT

NO.	SIGNAL
1	NC
2	/CS1
3	/RES
4	AO
5	SCL
6	SI
7	VDD
8	VDD2
9	VSS
10	NC
11	VG
12	NC
13	NC
14	NC
15	VO
16	XVO
17	NC
18	NC
19	NC
20	NC
21	NC
22	NC
23	NC

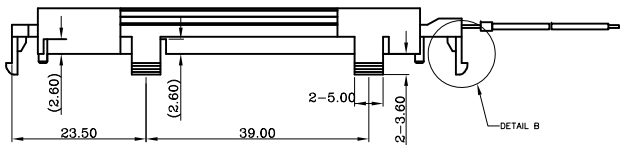

- NOTE:
 1. GENERAL TOLERANCE: ±0.2.
 2. (...) IS REFERENCE DIMENSION.
 3. COMPLY ROHS.
 4. * CRITICAL DIMENSION.

Display Type	STN (Y/G)
Operating Method	POSITIVE
Viewing Angle	TRANSMISSIVE
LCD Driver IC	1/65 DUTY,1/9 BIAS
Operating Voltage	6 O'CLOCK
Operation Temperature	ST7567
Storage Temperature	VDD=2.8V VLCD=9.3V
Interface	-10°C TO 60°C
Backlight Color	-20°C TO 70°C
	SERIAL-4SPI
	1PCS Green LED(15mA,3.15±0.25V)

VER.	SYMBOL	AMENDMENT	SIGN	DATE	CUSTOMER'S APPROVAL	DRAWN	JLF	TITLE	DRAWING NO.				
01		First Issue	JLF	12.03.29		EE.CHECKED	FJ	MODULE SPEC.	STR-TG9098				
						PE.CHECKED	FJ		BOM No:BM120312-08	UNIT	mm	SCALE	FIT
						APPROVED	YB			3rd Angle		SHEET 1 OF 1	
								TRUEVISION TECHNOLOGIES LTD					