

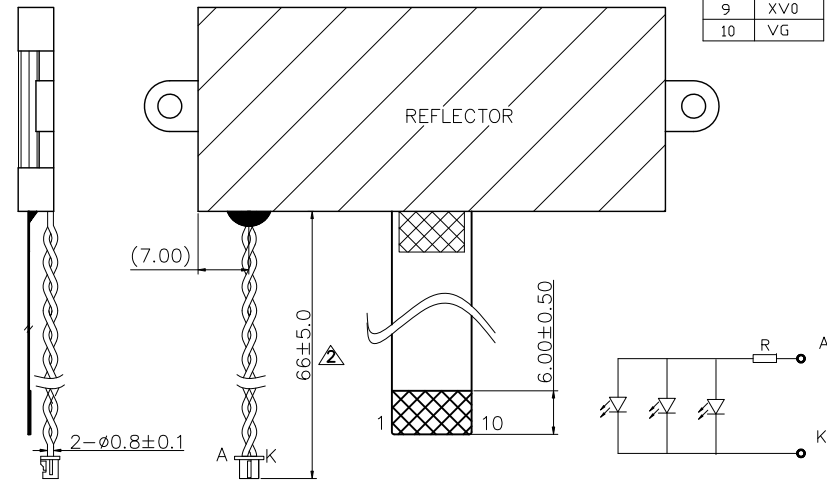
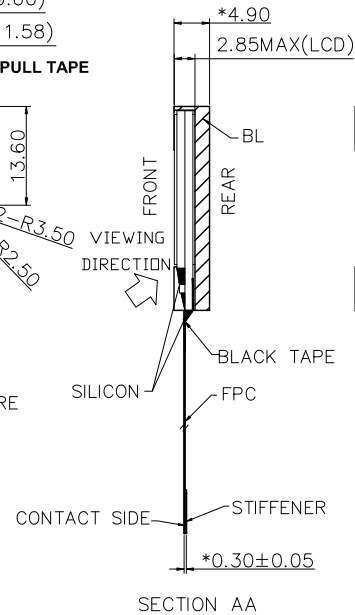


PIN ASSIGNMENT

NO.	SIGNAL
1	/CS
2	/RES
3	A0
4	SCLK
5	SDA
6	VDD
7	VSS
8	V0
9	XV0
10	VG



BACKLIGHT LED CIRCUIT
3PCS LED



- NOTE:
1. GENERAL TOLERANCE: ± 0.2 .
 2. (...) IS REFERENCE DIMENSION.
 3. * CRITICAL DIMENSION
 4. COMPLYABLY RoHS.

Display Type	STN(GRAY)
Front Polarizer	POSITIVE
Operating Method	1/33 DUTY,1/6 BIAS
Viewing Angle	6 O'CLOCK
LCD Driver IC	ST7567
Operating Voltage	VDD=3.3V VOP=7.65V
Operation Temperature	-20°C TO 70°C
Storage Temperature	-30°C TO 80°C
High Temperature/Humidity Storage	
Interface	4LINE
Backlight	WHITE(Vf=3.3V,If=45mA tp)

VER.	SYMBOL	AMENDMENT	SIGN	DATE	CUSTOMER'S APPROVAL	DRAWN	ZDL 2013.03.29	EE.CHECKED	YQ 2013.03.29	PE.CHECKED	YQ 2013.03.29	APPROVED	YB 2013.03.29	TITLE	BOM NO.:	DRAWING NO.	UNIT	mm	SCALE	FIT	SHEET	1 OF 1	
01		FIRST ISSUE	ZDL	13.03.29										MODULE SPEC.	BM130304-05A	STR-TG9164	3rd Angle	3					
TRUEVISION TECHNOLOGIES LTD																							