
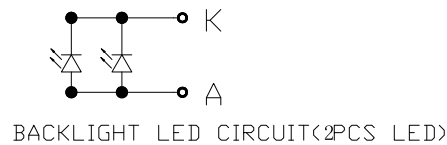



NO.	SIGNAL
1	NC
2	NC
3	A
4	K
5	GND
6	CSB
7	RESET
8	A0
9	SCLK
10	SDA
11	VDD
12	VSS
13	VO
14	XVO
15	VG
16	GND
17	NC
18	NC

NOTES:

1. GENERAL TOLERANCE: ±0.20.
2. (<...>) IS REFERENCE DIMENSION.
3. COMPLYABLY ROHS.
4. \* CRITICAL DIMENSION.



DISPLAY TYPE	FSTN POSITIVE TRANSMISSIVE
FRONT POLARIZER	/
OPERATING METHOD	1/65 DUTY 1/9 BIAS
OPERATION VOLTAGE(VDP)	VDD=3.3V VLCD=9.0V
VIEWING ANGLE	6 °CLOCK
OPERATION TEMPERATURE	-10°C TO 60°C
STORAGE TEMPERATURE	-20°C TO 70°C
HIGH TEMP./HUMIDITY STORAGE	/
CONNECTOR TYPE	Serial 4-Line SPI
LCD CONTROLLER/DRIVER	ST7567
BACKLIGHT COLOR	White(LF=30mA, VF=2.9-3.2V)

06					DRAWN	JLF	TITLE	DRAWING NO.			
05					EE.CHECKED	JLF	MODULE SPEC.	STR-TG9184			
04					PE.CHECKED	JLF		Bom No: BM130703-03B	UNIT	mm	SCALE
03					APPROVED	HJB	3rd Angle			SHEET	1 OF
02							TRUEVISION TECHNOLOGIES LTD.				
01	First issue		JLF	13.07.19	CUSTOMER'S APPROVAL						
VER.	SYMBOL	AMENDMENT	SIGN	DATE							