


NO.	SIGNAL
1	VG
2	XV0
3	V0
4	VSS
5	VDDA
6	VDDI
7	SDA
8	SCL
9	A0
10	RST
11	CS0

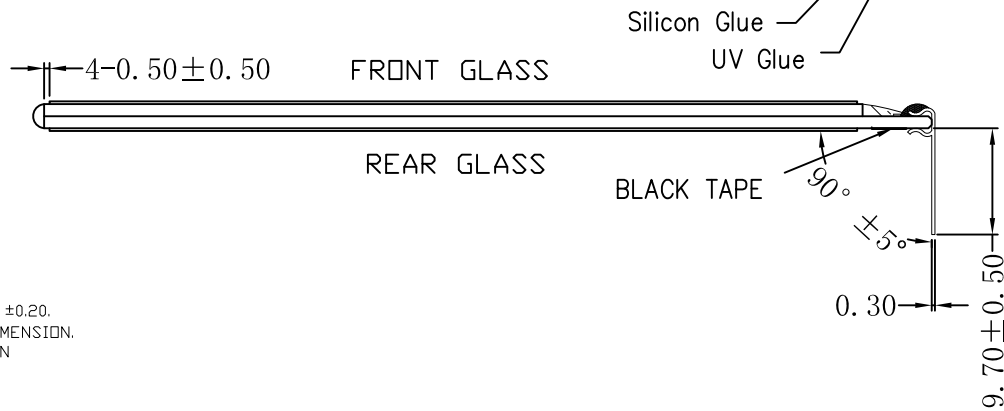

DISPLAY TYPE	FSTN(B/W) POSITIVE TRANSFLECTIVE
FRONT POLARIZER	NORMAL
OPERATING METHOD	1/64DUTY,1/9BIAS
DRIVER VOLTAGE	VDD=3.0V
OPERATION VOLTAGE	VOP=10.0V
VIEWING ANGLE	6:00
OPERATION TEMPERATURE	0°C TO 50°C
STORAGE TEMPERATURE	-20°C TO 70°C
CONNECTOR TYPE	PIN
INTERFACE	SPI
LCD CONTROLLER/DRIVER	ST7539
BACKLIGHT COLOR	WHITE

- NOTE:
 1. GENERAL TOLERANCE: ±0.20.
 2. (...) IS REFERENCE DIMENSION.
 3. * CRITICAL DIMENSION
 4. COMPLYABLY RoHS.

					DRAWN	LJW	TITLE MODULE SPEC.	DRAWING NO. STR-TG9255				
					EE.CHECKED	TJP		BOM NO.:BM140310-10A	UNIT	mm	SCALE	FIT
					PE.CHECKED	TJP			3rd Angle		SHEET 1 OF 1	
					APPROVED	HJB						
01		First issue	LJW	14.03.04	CUSTOMER'S APPROVAL		TRUEVISION TECHNOLOGIES LTD.					
VER.	SYMBOL	AMENDMENT	SIGN	DATE								