





NO.	SIGNAL	NO.	SIGNAL
1	GND	16	GND
2	NC	17	GND
3	NC	18	SCL
4	NC	19	SDA
5	NC	20	VI028
6	LED+	21	GND
7	LED-	22	GND
8	GND	23	GND
9	VI018	24	GND
10	GND	25	GND
11	GND	26	NC
12	GND	27	V0(NC)
13	CS	28	NC
14	RST	29	GND
15	A0	30	GND

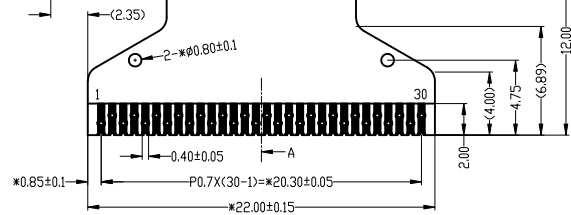

- NOTE:
1. GENERAL TOLERANCE: ±0.3.
  2. (...) IS REFERENCE DIMENSION.
  3. COMPLYABLY ROHS.
  4. \* CRITICAL DIMENSION.

DISPLAY TYPE	DFSTN
	NEGATIVE
	TRANSMISSIVE
FRONT POLARIZER	
OPERATING METHOD	1/65 DUTY
OPERATION VOLTAGE(VDP)	1/7 BIAS
VIEWING ANGLE	VDP=6.5V VDD=2.8V
OPERATION TEMPERATURE	6:00
STORAGE TEMPERATURE	-10°C TO +60°C
INTERFACE	-20°C TO +70°C
CONNECTOR TYPE	SPI
LCD DRIVER IC	FPC
	IST3080
BACKLIGHT COLOR	White
	If=15mA, Vf=3.0±0.2V

VER.	SYMBOL	AMENDMENT	SIGN	DATE	CUSTOMER'S APPROVAL	DRAWN	ZX	TITLE	DRAWING NO.
						EE.CHECKED	JJQ	MODULE SPEC.	STR-TG9500
					PE.CHECKED	HJB			
					APPROVED	HJB			
01		First issue	ZX	15.08.17				BOM NO.: BM150710-01A	UNIT
									mm
									SCALE
									FIT
									3rd Angle
									SHEET 1 OF 1
								TRUEVISION TECHNOLOGIES LTD.	